

Rainbow Acrylic Wall Putty

Rainbow Acrylic Wall Putty is a water based putty. It is one of the best products of its kind available in the market, provides a very strong, durable foundation and brings out the best performance from the finish paints, both in looks and in durability.



PRODUCT BENEFITS

Rainbow Acrylic Wall Putty is a water based, ready-to-use putty meant for filling and smoothening out cracks and dents on the plastered wall or similar interior surfaces.

a) The putty has special acrylic binders that ensure that it retains a strong grip on the wall surface, thereby increasing the life of the paint film.

b) It is made using special equipment and technology that ensure smoothness and consistency

c) On account of the putty's exceptional whiteness and smoothness, emulsions painted over the putty will tend to look richer

d) It also enhances breathability and lesser porosity compared to conventional putty, thus improving paint performance further

e) It is quick drying, thus ensuring faster completion of jobs


f) It has better alkali resistance, thus making it more suitable for new walls



WATER BASED

PRODUCT FEATURES

AVAILABLE PACKS

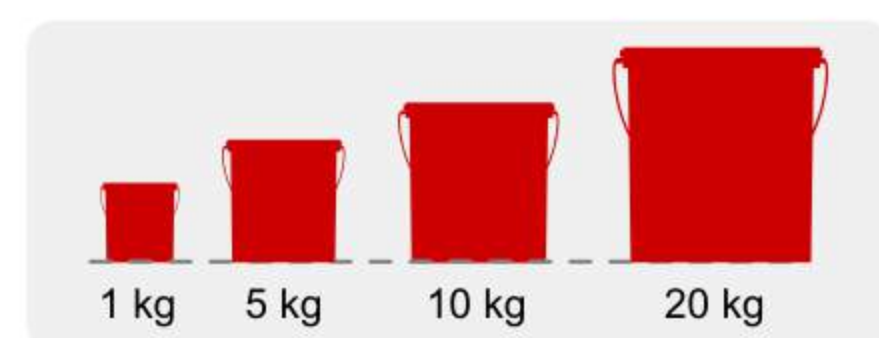

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COVERAGE



DRYING TIME TO TOUCH



RECOMMENDED USAGE

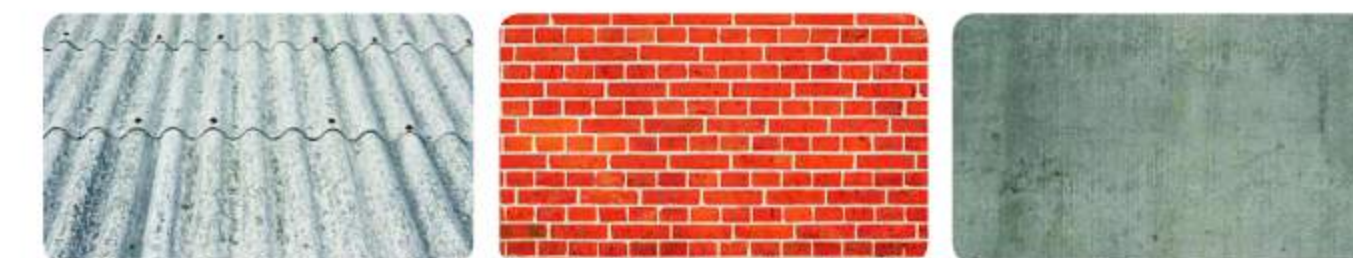

Can be used for priming plastered walls, asbestos, brick work, concrete, etc

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use appropriate product to limit further dampness.



FILLING FOR CRACKS For filling cracks upto 3mm use crack sealant



FILLING FOR HOLES & DENTS In case of dents and holes use Rainbow Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

APPLICATION PROCESS

Ensure the surface is clean, dry and free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down using emery paper 180 and thereafter wipe off. Treat fungus affected area. Allow to react for 6-8 hrs. Apply a coat of suitable Primer followed by Rainbow Wall Putty to level the dents and make the surface uniform. Apply again a coat of suitable Primer followed by sanding with emery paper 320, before applying subsequent top coats. Sand the surface with Emery Paper and wipe clean before application of subsequent coats.

ADDITIONAL INFORMATION

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY FEATURES

- > Kindly refer to the MSDS for Rainbow Acrylic Wall Putty which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- > Do not pour leftover paint down the drain or in water courses. In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.