

Rainbow Exterior Emulsion

Rainbow Exterior Emulsion is a smooth water based, modified acrylic, exterior wall finish with silicon additives.



PRODUCT BENEFITS

Weather Guard

Specially formulated to withstand extreme tropical conditions of high rainfall, humidity and heat.

Excellent protection against UV attack

Provides extremely good protection against alkali and UV degradation thus ensuring that the shade doesn't fade for a long time and the paint lasts longer.


Excellent antifungal performance

Provides excellent resistance to growth of algae and fungi to the walls. This prevents appearance of black spots on walls.



PRODUCT FEATURES

AVAILABLE PACKS




Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

COVERAGE



WASHABILITY

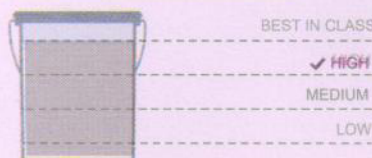

SOFT SHEEN FINISH

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use appropriate product to limit further dampness.



FILLING FOR CRACKS For filling cracks upto 3mm use crack sealant



FILLING FOR HOLES & DENTS In case of dents and holes use Rainbow Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

APPLICATION PROCESS

After application of exterior primer, sand the wall with emery paper 320 and wipe clean. Mix Rainbow Exterior Emulsion with 40% water for brush/roller or 40% water for spray, apply uniformly and wait for 3-4 hours for recoating. For 2nd coat, mix Rainbow Exterior Emulsion with 40% water for brush/roller or 40% water for spray, apply uniformly and wait for 3-4 hours.

ADDITIONAL INFORMATION

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Do not over-thin or over-extend the brush.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use.

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

SAFETY FEATURES

- > Kindly refer to the MSDS for Rainbow Exterior Emulsion which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses. In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.